




# ACOUSTIC PERFORMANCE DATA TABLES

**Glass Garage Doors & Entry Systems, Inc.**

## INSULATING ACOUSTICAL DATA

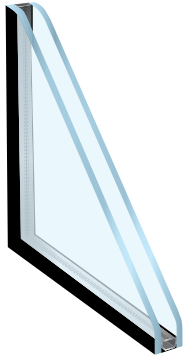


**bp** - Acoustical Glass is made from combinations of various glass types along with acoustical window frames to help you effectively reduce sound transmission from airplanes, trains, vehicles and other unwanted noises. The performance data below applies to an insulating unit constructed with two plies of glass and an air or argon filled space. Data is based on testing ~36" x 84" glass to ASTM E413-87 in an acoustical wall. \*OITC is estimated based on this test. Glass size and glazing system will affect STC rating.

The **STC (Sound Transmission Class)** rating is a single-number rating system for interior building partitions and viewing windows used to categorize acoustic performance. Its original intent was to quantify interior building partitions not exterior wall components. As a result it is not recommended for glass selection of exterior wall applications since the single-number rating was achieved under a specific set of laboratory conditions.

The **OITC (Outside-Inside Transmission Class)** rating is used to classify acoustic performance of glazing in exterior applications.

Insulating Glass Construction	STC	OITC*	Frequency (Hz)																	
			100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
			Sound Transmission Loss (dB)																	
1/2" overall - 1/8" glass, 1/4" airspace, 1/8" glass	<b>28</b>	<b>26</b>	26	21	23	23	26	21	19	24	27	30	33	36	40	44	46	39	34	45

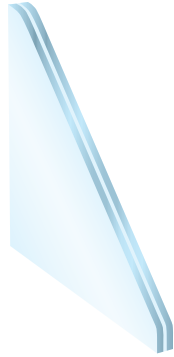

## LAMINATED ACOUSTICAL DATA

The performance data below applies to laminated glass units constructed with two plies of glass and an interlayer. Data is based on testing ~36" x 84" glass to ASTM E413-87 in an acoustical wall. \*OITC is estimated based on this test. Glass size and glazing system will affect STC rating.

Laminated Glass Construction	STC	OITC*	Frequency (Hz)																	
			100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000
			Sound Transmission Loss (dB)																	
1/4" overall - 1/8" glass, .015" PVB, 1/8" glass	<b>33</b>	<b>30</b>	27	23	27	24	27	28	29	31	33	35	35	35	33	31	32	37	41	45
3/16" overall - S/S glass, .030" PVB, S/S glass	<b>35</b>	<b>31</b>	29	29	29	25	27	29	29	31	32	34	34	34	34	35	33	36	39	41
1/4" overall - 1/8" glass, .030" PVB, 1/8" glass	<b>35</b>	<b>31</b>	25	26	28	27	29	29	30	32	34	35	35	36	36	35	35	38	43	46
1/4" overall - 1/8" glass, .045" PVB, 1/8" glass	<b>35</b>	<b>31</b>	24	27	27	28	28	29	30	32	34	35	36	36	37	36	35	38	43	46
5/16" overall - 1/8" glass, .060" PVB, 1/8" glass	<b>35</b>	<b>31</b>	25	25	26	29	28	30	30	32	34	35	35	36	36	36	36	39	43	46
3/8" overall - 3/16" glass, 0.15" PVB, 3/16" glass	<b>36</b>	<b>32</b>	27	25	26	30	31	31	33	35	35	35	35	33	33	37	41	44	48	51
3/8" overall - 3/16" glass, .030" PVB, 3/16" glass	<b>36</b>	<b>33</b>	27	27	27	30	31	31	33	34	35	36	36	35	34	37	41	45	49	52
3/8" overall - 1/4" glass, .030" PVB, 1/8" glass	<b>36</b>	<b>33</b>	27	28	26	30	31	31	32	34	35	36	36	35	35	36	40	44	48	51

**Insulated Aluminum Panels / 40 / 36 / 26 / 30 / 31 / 31 / 32 / 34 / 35 / 36 / 36 / 40 / 44 / 45 / 48 / 51 / 52 / 54 / 55 / 56**